

# "GEAR PUMPS"

## Suitable for Water, Oil & Various Liquids Applications



GB-13  
GC-13



GB-25  
GC-25

### Applications (GB)

- Water
- Sea water
- Weak acids
- Various chemicals
- Coal tar




### Applications (GC)

- Kerosene
- Light oil
- Machine oil
- Heavy oil



### Performance Curve

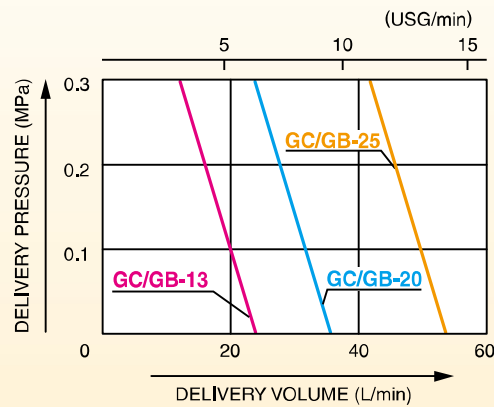

### Specifications

Model	GC-13	GB-13	GC-20	GB-20	GC-25	GB-25
Gear Material	GC: Cast Iron / GB: Brass					
Connection Dia	13 mm (½")		20 mm (¾")		25 mm (1")	
Delivery Volume	Revolution: 200 rpm	10 L/min (2 USG/min)	18 L/min ( 4 USG/min)		27 L/min ( 7 USG/min)	
	Revolution: 400 rpm	21 L/min (5 USG/min)	37 L/min ( 9 USG/min)		55 L/min (14 USG/min)	
	Revolution: 600 rpm	32 L/min (8 USG/min)	56 L/min (14 USG/min)		83 L/min (22 USG/min)	
Delivery Pressure	0.1 – 0.3 MPa (1 – 3 kg/cm <sup>2</sup> )					
Syphoning Factor	3 m (10 ft)					
Power	200 W		400 W		750 W	
Pulley	125 × A1		150 × A1		200 × A1	
Gross Weight	17.5 kg (38.6 lbs)		25 kg (55.1 lbs)		22.5 kg (49.6 lbs)	
Dimensions LxWxH (mm)	316 × 283 × 211		492 × 262 × 194		397 × 277 × 265	
Packing Unit	4				2	