

# Best for Sewage Application

- Cast iron (FC) casing ensures resistance to sewage. (PKS)
- The built-in thermal protector cuts off circuit in case of overload during operation.
- Only 3 butterfly bolts and strainer can be detached for maintenance. (PKS)



PSK-53222



PKS-55022


## Solids Sizes

Max. 10 mm



PSK-53222

Max. 15 mm




PKS-55022

## Specifications

Model		PSK-53222	PKS-55022
PUMP	Connection Dia	32 mm (1¼")	50 mm (2")
	Total Head	6 m (19.7 ft)	10 m (32.8 ft)
	Delivery Volume	140 L/min (37 USG/min)	300 L/min (79 USG/min)
Voltage		AC 220 V	
Frequency		50 Hz	
MOTOR	Rated Current	1.4 A	4.0 A
	Output	150 W	400 W
	Consumption	305 W	704 W
	Revolution	3200 rpm	2600 rpm
	Rating	Continuous	
	Type	Induction Motor	
	Power Cord	4 m (13.1 ft)	6 m (19.7 ft)
Standard Accessories	1 Coupling Set (φ32) 1 Hose Band (φ25) 1 Hose Band (φ32) 1 Hose Nipple (φ25)	1 Hose Band 1 Rope (5 m (16.4 ft)) 1 Hose Nipple	
Gross Weight	11 kg (25.5 lbs)	70 kg (154 lbs)	
Dimensions LxWxH (mm)	374 x 193 x 422	509 x 509 x 532	
Packing Unit	2	4	

## Performance Curve

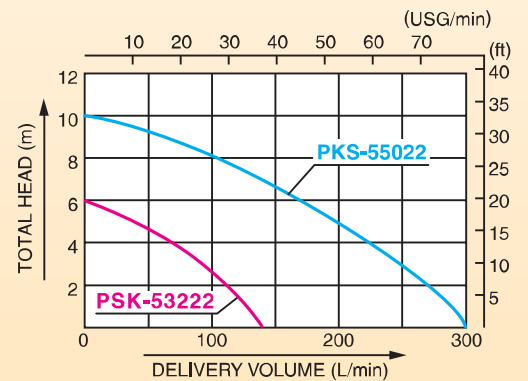

\*Starting current is three times higher than rated current.