

# Light & Durable

- Double mechanical seals using silicon carbide ensure durability and shaft protection.
- Thermal protector cuts off circuit in case of overload during operation.



PS-55022




PSA-55022

**Automatic  
Float Switch**

## ■ Specifications

Model		PS-55022	PSA-55022	
PUMP	Connection Dia	50 mm (2")		
	Total Head	10 m (32.8 ft)		
	Delivery Volume	280 L/min (74 USG/min)		
	Voltage	AC 220 V		
MOTOR	Frequency	50 Hz		
	Rated Current	3.6 A		
	Output	400 W		
	Consumption	600 W		
	Revolution	2600 rpm		
	Rating	Continuous		
	Type	Induction Motor		
	Power Cord	6 m (19.7 ft)		
	Standard Accessories	1 Hose Nipple 1 Hose Band 1 Rope (5 m (16.4 ft))	1 Hose Band 1 Rope (5 m (16.4 ft))	
	Gross Weight	58 kg (127.8 lbs)	65 kg (143.3 lbs)	
Dimensions LxWxH (mm)	460 × 460 × 442	495 × 495 × 505		
Packing Unit	4			

## ■ Performance Curve

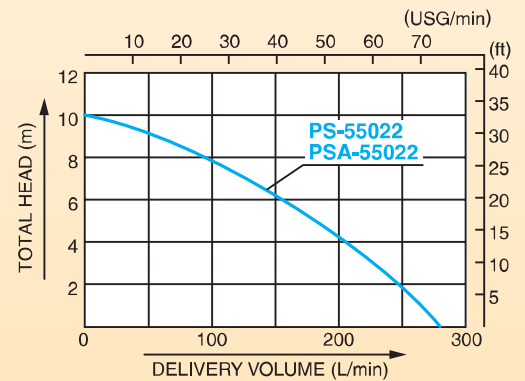

\*Starting current is three times higher than rated current.