


High Speed & High Load Rolling Up Max. Winch Up Power 900 kg

- Use magnet motor. Simple wiring and easy to switch direction between clockwise to counterclockwise.
- Approx. 25 % more power from usual 400 W type by high speed and high load rolling up.
- 2 stage switchable winch capacity (REL, RES).
Switch to 900 kg / 50 rpm and 450 kg / 100 rpm by gearshift.
- Motor case, Roller, etc are made of aluminum alloy.
Light, compact, sea water proof and no rust damage to FRP boat.
- Polyurethane coat protects corrosion perfectly.



Performance Curve

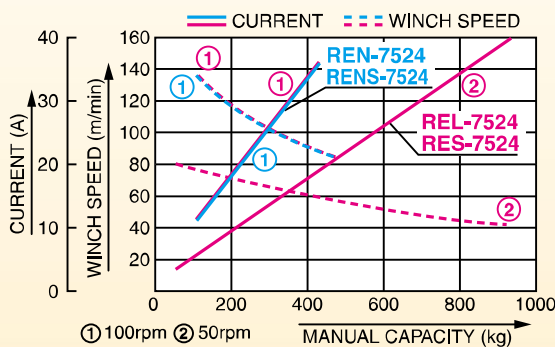

Specifications

| Model | REN-7524 | RENS-7524 | REL-7524 | RES-7524 |
|---|--|-----------------|--|-----------------|
| Voltage | DC 24 V | | | |
| Rated Current | 43 A | | | |
| Motor Output | 750 W | | | |
| Rating | 1 h / 43 A | | | |
| Roller Revolution | 100 rpm | | 50 rpm (Low), 100 rpm (High) | |
| Manual Capacity | 450 kg (150 A) | | 900 kg (Low), 450 kg (High), (150 A) | |
| Capacity Rating | 110 kg (43 A) | | 220 kg (Low), 110 kg (High), (43 A) | |
| Winch Speed | 33 m/min (108 ft/min) | | 17 m/min (55 ft/min) (Low), 33 m/min (108 ft/min) (High) | |
| Standard Accessories (RES, REN Type Only) | 1 Cable Gland For Ship, 1 Waterproofing Plate, 1 Vertical Type Main Body Packing, 2 Crimping Terminals | | | |
| Gross Weight | 25 kg (55 lbs) | 35 kg (77 lbs) | 24 kg (53 lbs) | 29 kg (64 lbs) |
| Dimensions LxWxH (mm) | 510 x 280 x 290 | 585 x 315 x 330 | 520 x 280 x 270 | 570 x 275 x 285 |
| Packing Unit | 1 | | | |