

"PONDY" & "MARINE PET" Submersible Pump for Seawater

■ Applications

- Feeding or draining water in fish farms
- Washing purpose
- Draining bilge water





SK-2524



BL-2524N

■ Performance Curve

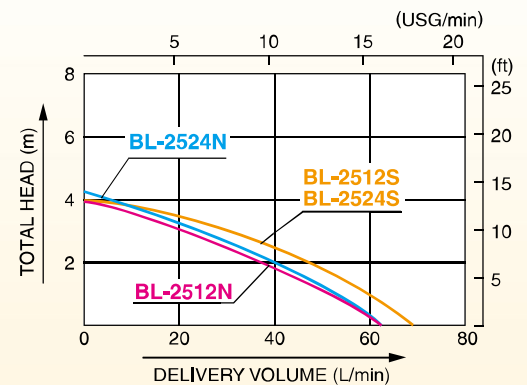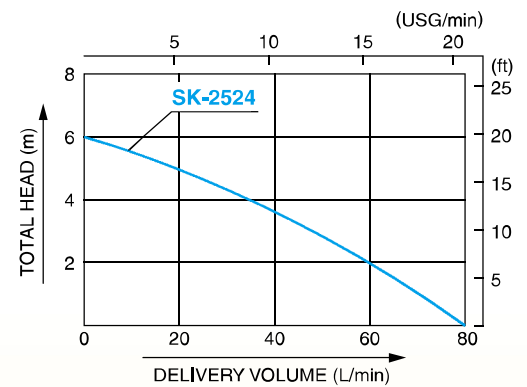

■ Specifications

	Model	SK-2524	BL-2512S	BL-2524S	BL-2512N	BL-2524N	
PUMP	Connection Dia	25 mm (1")					
	Total Head	6 m (19.6 ft)	4 m (13.1 ft)			4.2 m (13.8 ft)	
	Delivery Volume	80 L/min (21 USG/min)	70 L/min (18 USG/min)		63 L/min (16 USG/min)		
MOTOR	Voltage	DC 24 V	DC 12 V	DC 24 V	DC 12 V	DC 24 V	
	Frequency	—	—	—	—	—	
	Rated Current	8.5 A	6.5 A	3.5 A	7.8 A	3.8 A	
	Rating	Continuous					
	Output	123 W	45 W		50 W		
	Revolution	3200 rpm	5400 rpm		5800 rpm		
	Life Span	Approx. 500 hrs	Approx. 200 hrs		Approx. 500 hrs		
	Power Cord	5 m (16.4 ft)	2 m (6.5 ft)		2.95 m (9.7 ft)		
	Standard Accessories	1 Coupling Set (φ25) 1 Hose Nipple (φ20) 1 Hose Band (φ25) 1 Hose Band (φ20) 1 Rope (5 m (16.4 ft))		—		1 Elbow	
	Gross Weight	11 kg (24.2 lbs)	18.5 kg (40.7 lbs)		32 kg (70.5 lbs)		
Dimensions LxWxH (mm)	425 × 248 × 325	568 × 286 × 383		574 × 283 × 403			
Packing Unit	2			20			