


Up to 50% Fuel Saving Double Life Span

& Noise Reduction *

* Fuel consumption and engine noise are half of 2 stroke engine.



Performance Curve

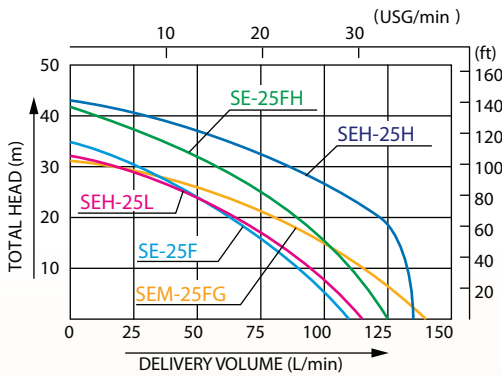

Available 25 mm Hose Set

N-Type Hose Set

- Washing of agriculture & construction machinery



- 1 Delivery hose <8 m (26 ft)>
- 1 Nozzle (Jet)

R-Type Hose Set

- Washing of agriculture machinery
- Water sprinkling to the field



- 1 Delivery hose <8 m (26 ft)>
- 1 Nozzle (Jet & Mist)

New Spray Nozzle



SJ-20

- Large volume of spraying water

- 1 Coupling set <20 mm (3/4")>
- 1 Hose nipple <20 mm (3/4") x 15 mm (1/2")>



Specifications

	Model	SEH-25L	SEH-25H	SE-25F	SE-25FH	SEM-25FG
PUMP	Connection Dia	25 mm (1")				
	Connection Thread	Outer Pipe Thread BSP				
	Total Head	32 m (105 ft)	43 m (141 ft)	35 m (115 ft)	42 m (138 ft)	31 m (102 ft)
	Delivery Volume	115 L/min (30 USG/min)	135 L/min (36 USG/min)	110 L/min (29 USG/min)	125 L/min (33 USG/min)	140 L/min (37 USG/min)
	Max. Suction Head	8 m (26 ft)				
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine				
	Model	Honda GX25	Honda GXH50	Subaru EH025	Subaru EH035	Mitsubishi GT241
	Exhaust Volume	25 cc	49 cc	24.5 cc	33.5 cc	79.6 cc
	Rated Output	—	—	0.55 kW (0.75 PS) / 7000 rpm	0.81 kW (1.1 PS) / 7000 rpm	1.3 kW (1.8 PS) / 3600 rpm
	Max. Output	0.81 kW (1.1 PS) / 7000 rpm	1.8 kW (2.5 PS) / 7000 rpm	0.81 kW (1.1 PS) / 7000 rpm	1.18 kW (1.6 PS) / 7000 rpm	1.8 kW (2.4 PS)
	Fuel	Automotive Unleaded Gasoline				
	Fuel Tank Capacity	0.55 L (0.14 USG)	0.9 L (0.24 USG)	0.5 L (0.13 USG)	0.65 L (0.17 USG)	1.6 L (0.42 USG)
	Continuous Operating Time	Approx. 1 hrs		Approx. 50 min		Approx. 2 hrs
	Starting Method	Recoil Starter				
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set				
Gross Weight	7 kg (15.4 lbs)	13.5 kg (29.7 lbs)	5.6 kg (14.5 lbs)	9.5 kg (20.9 lbs)	18 kg (39.7 lbs)	
Dimensions LxWxH (mm)	375 x 243 x 320	385 x 311 x 453	358 x 255 x 335	378 x 273 x 350	485 x 325 x 385	
Packing Unit	1					