

# Long Durability "REVOLVEX PUMP with MOTOR" & "RUBBER MASTER"


- Compact design and can be removed on the deck easily.
- Small and compact, but, large delivery volume for this class of pumps.
- They can be used continuously with motor fan.
- Dry prime pump, no need to prime with water, immediate suction.

**Easy to Remove  
in The Ship**



MF-40MS



**Easy to Replace  
Carbon Brushes**

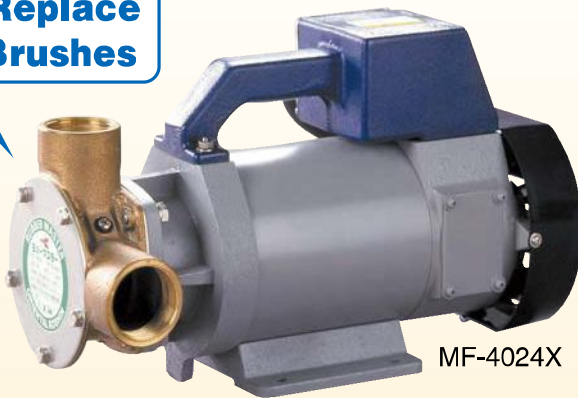

MF-4024X

\* To transfer fuel, please use special impeller for oil. (Impeller type : MF-2524KN)  
Please refer to page 47.

## ■ Performance Curve

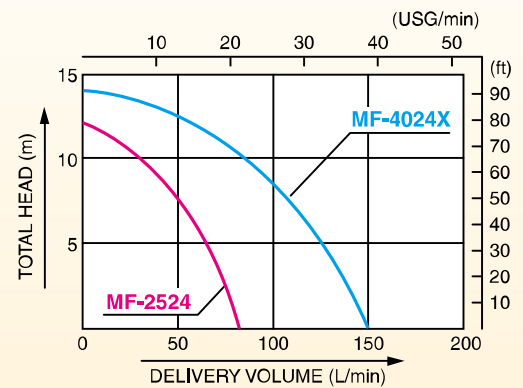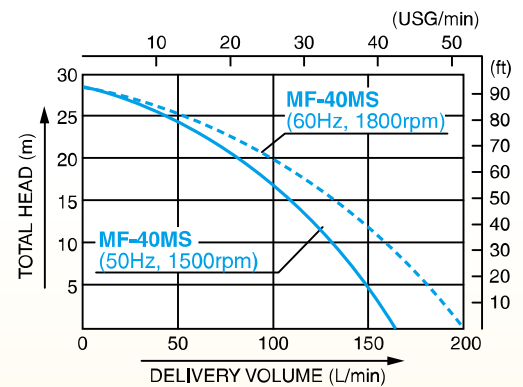

## ■ Specifications

	Model	MF-40MS	MF-2524	MF-4024X
PUMP	Connection Dia	40 mm (1½")	25 mm (1")	40 mm (1½")
	Connection Thread	Inner Pipe Thread		
	Material	Bronze Castings (Gunmetal)		
	Total Head	29 m (95 ft)	9 m (29.5 ft)	14 m (45.9 ft)
	Max. Self-Priming Head	5 m (16 ft)	3.5 m (11 ft)	
	Delivery Volume	60 Hz : 200 L/min (52 USG/min) 50 Hz : 170 L/min (44 USG/min)	80 L/min (21 USG/min)	150 L/min (39 USG/min)
MOTOR	Voltage	Three Phase 200 V		DC 24V
	Current	6.8 A / 50 Hz, 6.0 A / 60 Hz		12 – 15 A
	Output	1.5 kW		250 W
	Power Cord	10 m (1.25 mm <sup>2</sup> )		5 m (2 mm <sup>2</sup> )
Standard Accessories	1 Strainer, 1 Hose Band (φ48)	1 Strainer, 2 Connecting Nipples (φ25), 3 Hose Bands (φ32)		1 Strainer, 1 Hose Band (φ48)
Gross Weight	24 kg (53 lbs)	8.8 kg (19 lbs)	22 kg (48 lbs)	
Dimensions LxWxH (mm)	498 × 254 × 359	325 × 223 × 253	429 × 230 × 295	
Packing Unit		1		