

# Long Life & Quiet for Home Use

- Thermal protector cuts off circuit in case of overload during operation.
- Effective motor cooling system.




NSM-2022



NSM-2522

## Performance Curve

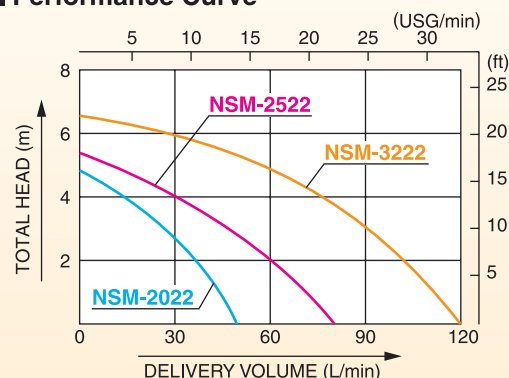

## Specifications

Model		NSM-2022	NSM-2522	NSM-3222
PUMP	Connection Dia	20 mm (¾")	25 mm (1")	32 mm (1¼")
	Total Head	4.8 m (15.7 ft)	5.5 m (18.0 ft)	6.5 m (21.3 ft)
	Delivery Volume	50 L/min (13 USG/min)	80 L/min (21 USG/min)	120 L/min (31 USG/min)
MOTOR	Voltage	AC 220 V		
	Frequency	50 Hz		
	Rated Current	0.7 A	1.0 A	1.2 A
	Output	48 W	100 W	150 W
	Consumption	_____		
	Revolution	2800 rpm (50 Hz)		
	Rating	Continuous		
	Motor Type	Condenser Induction Motor		
	Power Cord	4 m (13.1 ft)		5 m (16.4 ft)
	Standard Accessories	1 Coupling Set (φ20) 1 Hose Nipple (φ15) 1 Hose Band (φ15) 1 Hose Band (φ20)	1 Coupling Set (φ25) 1 Hose Nipple (φ20) 1 Hose Band (φ20) 1 Hose Band (φ25)	1 Coupling Set (φ32) 1 Hose Nipple (φ25) 1 Hose Band (φ25) 1 Hose Band (φ32)
Gross Weight	19 kg (41.8 lbs)	17 kg (37.4 lbs)	21 kg (46.3 lbs)	
Dimensions LxWxX (mm)	435 × 298 × 340	325 × 325 × 365	355 × 355 × 363	
Packing Unit	6		4	