

Great Durability



PX-55022

For Residual Water Up to 1 mm

- Designed for application in narrow access drainage especially in manhole or bottom pit.




PXL-52522

Applications

- Drainage of underground water
- Disposal of residual water from roof tank of buildings, swimming pools, etc.
- Construction site
- Pond / Aquarium usage
- Irrigation
- Home / Domestic application

Performance Curve

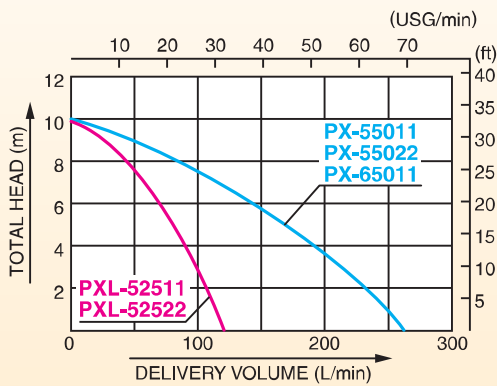

*Starting current is three times higher than rated current.

Invertible Delivery Flange

Just 2 bolts delivery flange is inverted



Specifications

| Model | | PX-55011 | PX-55022 | PX-65011 | PXL-52511 | PXL-52522 | |
|-----------------------|-----------------|--|---------------|------------------------|---|-----------|--|
| PUMP | Connection Dia | 50 mm (2") | | | 25 mm (1") | | |
| | Total Head | 10 m (32.8 ft) | | | | | |
| | Delivery Volume | 260 L/min (68 USG/min) | | | 120 L/min (31 USG/min) | | |
| MOTOR | Voltage | AC 110 V | AC 220 V | Single 110 V | AC 110 V | AC 220 V | |
| | Frequency | 50 Hz | | 60 Hz | 50 Hz | | |
| | Rated Current | 6.5 A | 3.2 A | 6.5 A | 6.0 A | 2.9 A | |
| | Output | 400 W | | | | | |
| | Consumption | 580 W | 620 W | 700 W | 590 W | 540 W | |
| | Revolution | 2900 rpm | | | 3400 rpm | 2900 rpm | |
| | Model | Condenser Induction Motor | | | | | |
| | Power Cord | 10 m (32.8 ft) | 5 m (16.4 ft) | 6 m (19.7 ft) | 10 m (32.8 ft) | | |
| Standard Accessories | | 1 Hose Band, 1 Rope (5 m (16.4 ft)), 1 Hose Nipple | | 1 Rope (5 m (16.4 ft)) | 1 Hose Band, 1 Hose Nipple, 1 Coupling, 1 Coupling Packing, 1 Rope (5 m (16.4ft)) | | |
| Gross Weight | | 25 kg (55.1 lbs) | | | 30 kg (66.1 lbs) | | |
| Dimensions L×W×H (mm) | | 258 × 500 × 424 | | | 515 × 270 × 432 | | |
| Packing Unit | | 2 | | | | | |