

Light Weight 2 Stroke Engine Pumps



Super Light




SE-25L



SEM-25L

Performance Curve

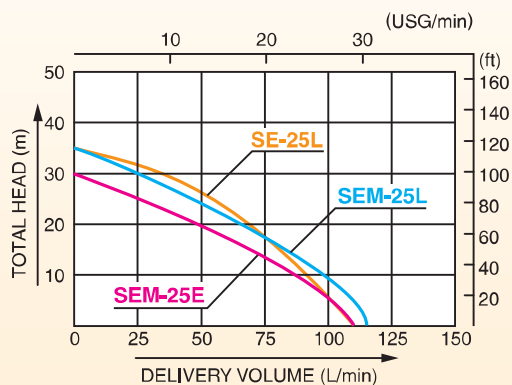

SEM-25E

Specifications

	Model	SE-25L	SEM-25L	SEM-25E
PUMP	Connection Dia	25 mm (1")		
	Connection Thread	Outer Pipe Thread BSP		
	Total Head	35 m (115 ft)	35 m (115 ft)	30 m (98 ft)
	Delivery Volume	110 L/min (29 USG/min)	115 L/min (30 USG/min)	110 L/min (29 USG/min)
	Max. Suction Head	8 m (26 ft)		
ENGINE	Type	Forced Air-cooled 2-stroke Gasoline Engine		
	Model	Subaru EC025GR	Mitsubishi TU26	Mitsubishi TLE20
	Exhaust Volume	24.5 cc	25.6 cc	19.8 cc
	Rated Output	0.55 kW (0.75 PS) / 6000 rpm	—	—
	Max. Output	0.88 kW (1.2 PS) / 7000 rpm	1.03 kW (1.4 PS) / 7500 rpm	0.6 kW (0.8 PS) / 7000 rpm
	Fuel	2 Stroke Mixed Gas and Oil (25:1)		
	Fuel Tank Capacity	0.6 L (0.16 USG)	0.6 L (0.16 USG)	0.45 L (0.12 USG)
	Continuous Operating Time	Approx. 50 min	Approx. 50 min	
	Starting Method	Recoil Starter		
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set		
Gross Weight	6.0 kg (13.2 lbs)	6.5 kg (14.3 lbs)		
Dimensions L×W×H (mm)	300 × 225 × 333	330 × 245 × 325	305 × 265 × 333	
Packing Unit	1			